

**Insulated Panels**  
Standing Seam Systems

Protected by




# WB6 Profiled Liners Product Data Sheet




# Profiled Liner – WB6

## Technical Data

The WB6 profile is typically used for industrial applications as part of a single or twin skin roof or wall cladding solution. The profile can be laid vertically, horizontally or diagonally.

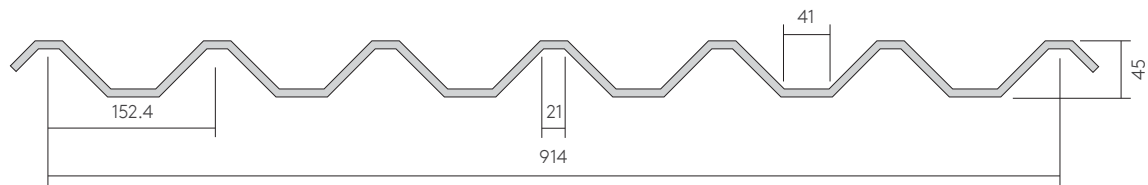

With optional side lap

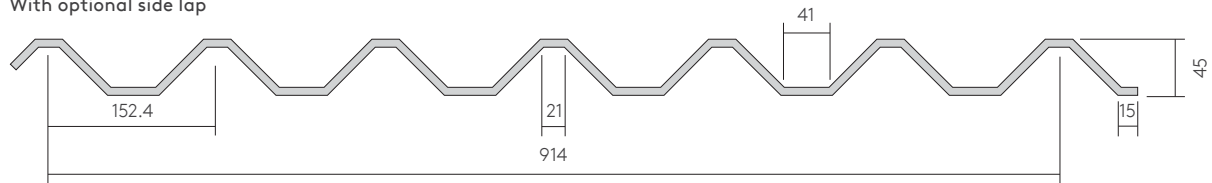

### Product Specification


Materials:	Steel – S220GD with either a Z275 galvanised (ASTM A653) or AZ150 AluZinc (ASTM A792) coating. Aluminium – AA3105 alloy to ASTM B209
Coatings:	Kingspan PVDF, Kingspan Spectrum, Kingspan Polyester
Lengths:	1.5 m to 12 m
Thickness:	See table
Fire Performance:	Kingspan sheets in either steel and aluminium carries a spread of flame and smoke index rating of zero. For further information, please contact Kingspan Technical Department
Product Tolerances:	Length: $\pm 7$ mm (0 – 3,500 mm) / 0.5 mm for each metre Width: $\pm 2$ mm Edge squareness: $\pm 3$ mm
Curving:	See table
Perforation:	The below perforation options are available

### Dimensions and Weight

Substrate Thickness (mm)	0.50	0.60	0.70	0.80	0.90	1.00	
Weight (kg/m <sup>2</sup> )	– Steel	4.63	5.55	6.48	7.40	8.33	9.25
	– Aluminium	1.61	1.93	2.26	2.58	2.90	3.22

### Convex Curving

Type	Material	Perforation	Min Radius (mm)
Crimped curved	Steel and aluminium	Non-perforated	600
		Perforated	1,000

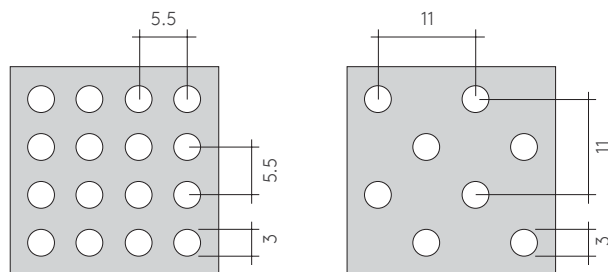

## Load Span – Profiled Liner WB6

Steel at 220 MPa Yield Strength

Profile Thickness (mm)	Span (m)	Wind Suction Load (KN/m <sup>2</sup> )			Imposed Load (KN/m <sup>2</sup> )		
		Single	Double	Multiple	Single	Double	Multiple
0.50	1000	4.58	5.92	6.91	7.37	3.35	3.67
	1200	3.20	4.12	4.81	4.24	2.78	3.05
	1400	2.36	3.04	3.55	2.64	2.37	2.60
	1600	1.82	2.34	2.73	1.75	2.07	2.27
	1800	1.45	1.86	2.16	1.21	1.83	2.01
	2000	1.18	1.51	1.76	0.86	1.54	1.80
	2200	0.93	1.26	1.46	0.63	1.26	1.48
	2400	0.73	1.07	1.24	0.47	1.05	1.23
	2600	0.58	0.92	1.06	0.36	0.88	0.95
	1000	5.50	7.10	8.29	8.85	4.02	4.40
0.60	1200	3.84	4.95	5.77	5.09	3.34	3.66
	1400	2.83	3.65	4.26	3.17	2.85	3.12
	1600	2.18	2.81	3.27	2.10	2.48	2.72
	1800	1.74	2.23	2.60	1.45	2.20	2.41
	2000	1.42	1.82	2.11	1.04	1.85	2.16
	2200	1.12	1.51	1.76	0.76	1.51	1.78
	2400	0.88	1.28	1.49	0.57	1.26	1.48
	2600	0.70	1.10	1.27	0.43	1.06	1.14
0.70	1000	6.42	8.28	9.67	10.32	4.69	5.14
	1200	4.48	5.77	6.73	5.93	3.89	4.27
	1400	3.31	4.26	4.96	3.70	3.32	3.64
	1600	2.55	3.28	3.82	2.45	2.90	3.18
	1800	2.03	2.60	3.03	1.69	2.56	2.81
	2000	1.65	2.12	2.47	1.21	2.15	2.52
	2200	1.31	1.76	2.05	0.89	1.76	2.08
	2400	1.02	1.49	1.73	0.66	1.47	1.72
0.80	2600	0.82	1.28	1.49	0.50	1.24	1.33
	1000	7.33	9.47	11.05	11.79	5.36	5.87
	1200	5.12	6.60	7.70	6.78	4.45	4.88
	1400	3.78	4.87	5.67	4.23	3.80	4.16
	1600	2.91	3.74	4.36	2.80	3.31	3.63
	1800	2.32	2.97	3.46	1.94	2.93	3.22
	2000	1.89	2.42	2.82	1.38	2.46	2.88
	2200	1.50	2.02	2.34	1.01	2.02	2.37
0.90	2400	1.17	1.71	1.98	0.76	1.68	1.97
	2600	0.94	1.46	1.70	0.57	1.41	1.53
	1000	8.25	10.65	12.43	13.27	6.03	6.61
	1200	5.75	7.42	8.66	7.63	5.00	5.48
	1400	4.25	5.48	6.38	4.76	4.27	4.68
	1600	3.27	4.21	4.91	3.15	3.72	4.08
	1800	2.60	3.35	3.89	2.18	3.30	3.62
	2000	2.13	2.73	3.17	1.55	2.77	3.24
1.00	2200	1.68	2.27	2.64	1.14	2.27	2.67
	2400	1.32	1.92	2.23	0.85	1.89	2.21
	2600	1.05	1.65	1.91	0.64	1.59	1.72
	1000	9.17	11.84	13.81	14.74	6.70	7.34
	1200	6.39	8.25	9.62	8.48	5.56	6.09
	1400	4.72	6.08	7.09	5.29	4.75	5.20
	1600	3.64	4.68	5.45	3.50	4.14	4.54
	1800	2.89	3.72	4.33	2.42	3.66	4.02
1.00	2000	2.36	3.03	3.52	1.73	3.08	3.60
	2200	1.87	2.52	2.93	1.27	2.52	2.96
	2400	1.46	2.13	2.48	0.94	2.10	2.46
	2600	1.17	1.83	2.12	0.71	1.77	1.91

### Notes:

1. Deflection limits are L/180 for wind suction loads and L/240 for imposed loads.
2. The values in this load-span table consider load factors of 1.40 for dead load and 1.60 for imposed and wind loads.
3. The minimum bearing width allowed for to generate the values in this load-span is 60 mm.
4. Detailed static calculations based on project loadings shall supersede this load-span table.

# Profiled Liner – WB6

## Technical Data

### Load Span – Profiled Liner WB6

Aluminium at 130 MPa Yield Strength

Profile Thickness (mm)	Span (m)	Wind Suction Load (KN/m <sup>2</sup> )			Imposed Load (KN/m <sup>2</sup> )		
		Single	Double	Multiple	Single	Double	Multiple
0.50	1000	2.70	3.49	4.07	2.52	1.51	1.65
	1200	1.88	2.43	2.83	1.45	1.26	1.37
	1400	1.19	1.79	2.08	0.90	1.07	1.18
	1600	0.80	1.37	1.60	0.60	0.94	1.03
	1800	0.57	1.09	1.27	0.41	0.83	0.91
	2000	0.42	0.88	0.99	0.29	0.74	0.74
	2200	0.32	0.73	0.75	0.22	0.55	0.55
	2400	0.25	0.58	0.58	0.16	0.42	0.42
	2600	0.20	0.46	0.46	0.12	0.32	0.32
0.60	1000	3.24	4.18	4.88	3.02	1.81	1.99
	1200	2.25	2.91	3.40	1.74	1.51	1.65
	1400	1.43	2.14	2.50	1.08	1.29	1.41
	1600	0.97	1.65	1.92	0.72	1.12	1.23
	1800	0.68	1.30	1.52	0.49	0.99	1.09
	2000	0.50	1.06	1.19	0.35	0.89	0.89
	2200	0.38	0.88	0.90	0.26	0.66	0.66
	2400	0.30	0.70	0.70	0.19	0.50	0.50
0.70	1000	3.78	4.88	5.70	3.52	2.12	2.32
	1200	2.63	3.40	3.96	2.02	1.76	1.92
	1400	1.67	2.50	2.92	1.26	1.50	1.65
	1600	1.13	1.92	2.24	0.84	1.31	1.44
	1800	0.80	1.52	1.77	0.58	1.16	1.27
	2000	0.59	1.24	1.38	0.41	1.04	1.04
	2200	0.45	1.03	1.05	0.30	0.77	0.77
	2400	0.35	0.81	0.81	0.22	0.59	0.59
0.80	1000	4.32	5.58	6.51	4.03	2.42	2.65
	1200	3.00	3.88	4.53	2.31	2.01	2.20
	1400	1.91	2.86	3.33	1.44	1.72	1.88
	1600	1.29	2.19	2.56	0.95	1.50	1.64
	1800	0.91	1.74	2.03	0.66	1.33	1.45
	2000	0.67	1.41	1.58	0.47	1.19	1.19
	2200	0.51	1.17	1.20	0.34	0.88	0.88
	2400	0.40	0.93	0.93	0.26	0.67	0.67
0.90	1000	4.85	6.27	7.32	4.53	2.72	2.98
	1200	3.38	4.37	5.10	2.60	2.26	2.47
	1400	2.15	3.22	3.75	1.62	1.93	2.12
	1600	1.45	2.47	2.88	1.07	1.68	1.85
	1800	1.03	1.96	2.28	0.74	1.49	1.64
	2000	0.76	1.59	1.78	0.53	1.33	1.33
	2200	0.58	1.32	1.34	0.39	0.99	0.99
	2400	0.45	1.04	1.04	0.29	0.75	0.75
1.00	1000	5.39	6.97	8.14	5.03	3.02	3.31
	1200	3.76	4.85	5.66	2.89	2.51	2.75
	1400	2.39	3.57	4.17	1.80	2.15	2.35
	1600	1.61	2.74	3.20	1.19	1.87	2.05
	1800	1.14	2.17	2.53	0.82	1.66	1.82
	2000	0.84	1.77	1.98	0.59	1.48	1.48
	2200	0.64	1.47	1.49	0.43	1.10	1.10
	2400	0.50	1.16	1.16	0.32	0.84	0.84
2600	0.40	0.92	0.92	0.24	0.65	0.65	

Notes:

1. Deflection limits are L/180 for wind suction loads and L/240 for imposed loads.
2. The values in this load-span table consider load factors of 1.40 for dead load and 1.60 for imposed and wind loads.
3. The minimum bearing width allowed for to generate the values in this load-span is 60 mm.
4. Detailed static calculations based on project loadings shall supersede this load-span table.

---

# Contact details

---

## Middle East, Africa, Turkey & Central Asia

**Kingspan Insulated Panels  
Manufacturing LLC**  
PO Box 60493  
Dubai Investment Park  
Jebel Ali Dubai, UAE

T: +971 (0) 4-8854 232  
E: [info@kingspanpanels.ae](mailto:info@kingspanpanels.ae)  
[www.kingspanpanels.ae](http://www.kingspanpanels.ae)

---

## UK & Europe

**Kingspan Limited**  
Greenfield Business Park 2  
Bagillt Road | Holywell  
CH8 7GJ

T: +44 (0) 1352 716 100  
E: [kingzip@kingspan.com](mailto:kingzip@kingspan.com)  
[www.kingspanpanels.co.uk](http://www.kingspanpanels.co.uk)

---

## Americas

**Morin Corporation**  
685 Middle Street | Bristol  
CT 06010 | U.S.A.  
T: +1 (860) 584-0900  
E: [kingzip@kingspan.com](mailto:kingzip@kingspan.com)  
[www.kingspanpanels.com](http://www.kingspanpanels.com)

---

## South East Asia

**Kingspan Insulated Panels Pty Limited**  
1 Commonwealth Lane #07-26  
Singapore 149544  
T: +65 6264 5942  
E: [infosea@kingspan.com](mailto:infosea@kingspan.com)  
[www.kingspanpanels.sg](http://www.kingspanpanels.sg)

---

## India

**Kingspan Jindal Pvt. Ltd.**  
Old Manesar Road | Narsinghpur  
Gurgaon - 122001 | Haryana | India  
T: +91 124 4393 200  
E: [sales@kingspanjindal.com](mailto:sales@kingspanjindal.com)  
[www.kingspanjindal.com](http://www.kingspanjindal.com)

---

## Australia

**Kingspan Insulated Panels Australia**  
38-52 Dunheved Circuit  
St Marys | NSW 2760  
T: +61 (02) 8889 3000  
E: [info@kingspanpanels.com.au](mailto:info@kingspanpanels.com.au)  
[www.kingspanpanels.com.au](http://www.kingspanpanels.com.au)

---

## New Zealand

**Kingspan Limited**  
97 Montreal Street | Sydenham  
Christchurch  
T: +64 (0) 800 121280  
E: [info@kingspanpanels.co.nz](mailto:info@kingspanpanels.co.nz)  
[www.kingspanpanels.co.nz](http://www.kingspanpanels.co.nz)

---

For the product offering in other markets please contact your local sales representative or visit [www.kingspanpanels.com](http://www.kingspanpanels.com)

Care has been taken to ensure that the contents of this publication are accurate, but Kingspan Limited and its subsidiary companies do not accept responsibility for errors or for information that is found to be misleading. Suggestions for, or description of, the end use or application of products or methods of working are for information only and Kingspan Limited and its subsidiaries accept no liability in respect thereof.