



BIODISC®

HIGH PERFORMANCE SEWAGE
TREATMENT PLANTS FOR
RESIDENTIAL, BUSINESS
& LEISURE APPLICATIONS



Let us help!

Free professional
site visit with friendly
support and advice.

klargest@kingspan.com
to make the right decision
or call **01296 633033**

60 YEARS OF
Expertise &
Innovation
1955-2015

BioDisc®

HIGH PERFORMANCE SEWAGE TREATMENT PLANTS FOR RESIDENTIAL, BUSINESS & LEISURE APPLICATIONS

The Kingspan Klargester BioDisc® utilises proven rotating biological contactor (RBC) technology, and this range of larger BioDisc® treatment plants enables Klargester to offer solutions against a much wider range of applications.

All Kingspan Klargester treatment plants are delivered direct to site and ready to install. The process is self-establishing, and does not require the addition of cultures or chemicals.

Improving environmental standards, more stringent controls, new European guidelines and the introduction of new Building Regulations have placed greater responsibility on specifiers and users to ensure they select the correct treatment system for their application.

Kingspan Klargester BioDisc® treatment plants have been designed to provide an engineered package solution to meet a wide range of applications and discharge qualities.

ASSURED PERFORMANCE

Kingspan Klargester's unique patented Managed Flow System has been specifically designed to maintain optimum performance despite shock organic loadings and hydraulic surges.

The detrimental effects of modern disinfectants and cleaning materials are minimised by the managed flow system.



COMMERCIAL APPLICATIONS

Certain commercial applications, such as pubs, clubs, hotels and industrial units, place additional stresses on the wastewater treatment process.

The sewage strength from the cocktail of detergents, cleaners, and chemicals demands a greater treatment capacity than a purely residential application. In such instances Kingspan Klargester can advise on the best possible treatment and BioDisc® can meet your requirements efficiently and cost-effectively.

PROCESS DESIGN

BioDisc® uniquely provides four separate treatment zones within a single vessel.

Primary Settlement Section 1 :

Wastewater enters the primary chamber. Solids and heavy particles, including non-biodegradable items, settle and consolidate into a sludge which requires periodic removal. Liquid still containing some solid particles rises upwards into the

Primary Biozone 2 : Discs in this area, rotating at approximately two revolutions per minute, allow oxygen to be absorbed into the developing biofilm as naturally occurring bacteria attach to the discs. These discs provide a highly beneficial pre-treatment area.

Get in touch for a **FREE** professional site visit and a representative will contact you within 5 working days to arrange a visit.
klargester@kingspan.com to make the right decision or call **01296 633033**

Flow Management Device 3 : Forward flow is controlled by a baling device attached to the rotor assembly and a pre-determined volume of partially treated waste is transferred into the secondary disc zone. Incoming flows in excess of the baling device capacity stay in the primary area and it is this that creates hydraulic balancing within the plant. Zones 1 and 2 (as above) between them have a balancing capacity equal to approximately 25% of the design flow of the plant and it is this feature that can allow the plant to retain six hours flow in the event of a power failure. This is now a requirement under the latest Building Regulations Part H2.

Secondary Disc Zone 4 : Flows entering this zone are exposed to a second and separate bank of discs on which grow a further matrix of bacteria. Protected from flow variation and harmful contaminants, the bacteria efficiently use the nutrients in the effluent as a food source.

The rotation of the discs creates a gentle flow path within both disc zones that moves wastewater along the zone and rotation also sloughs ageing or surplus bacteria from the discs creating space for new bacteria to develop.

A key benefit of BioDisc® is that the whole surface area is continually regenerated with new biological growth and that there is constant replenishment as all spent bacteria are flushed into the final settlement zone.


It is often the case with submerged or fixed media treatment processes, that the biological zones become clogged with dead or excessive biological growth, inhibiting treatment and demanding expensive and dirty maintenance.

Final Settlement Zone 5 : The almost fully treated effluent, is displaced from the disc area into the final settlement zone. The final settlement zone is fitted with a simple sludge return pump that transfers the settled material from the base of this zone into the primary settlement zone. This improves process performance by protecting the outlet and returning dilute and active biomass into the primary tank. This feature can be modified for seasonal flow variations.

The final effluent, free from solids and pollutants, exists through the outlet pipe.

PROCESS FEATURES

- Kingspan Klargester Patented Flow Management (KPFM)
- No process maintenance required
- Simple mechanics
- Self generating bacteriological process
- KPFM provides the capability to adjust plant performance
- Designed and tested to EN12566-3 (BD-BF)
- Designed in accordance with EN 12255 (BG-BL)
- CE marked
- Sludge return pump in final settlement tank to enhance performance. Sludge return can be configured to help overcome seasonal flow variations

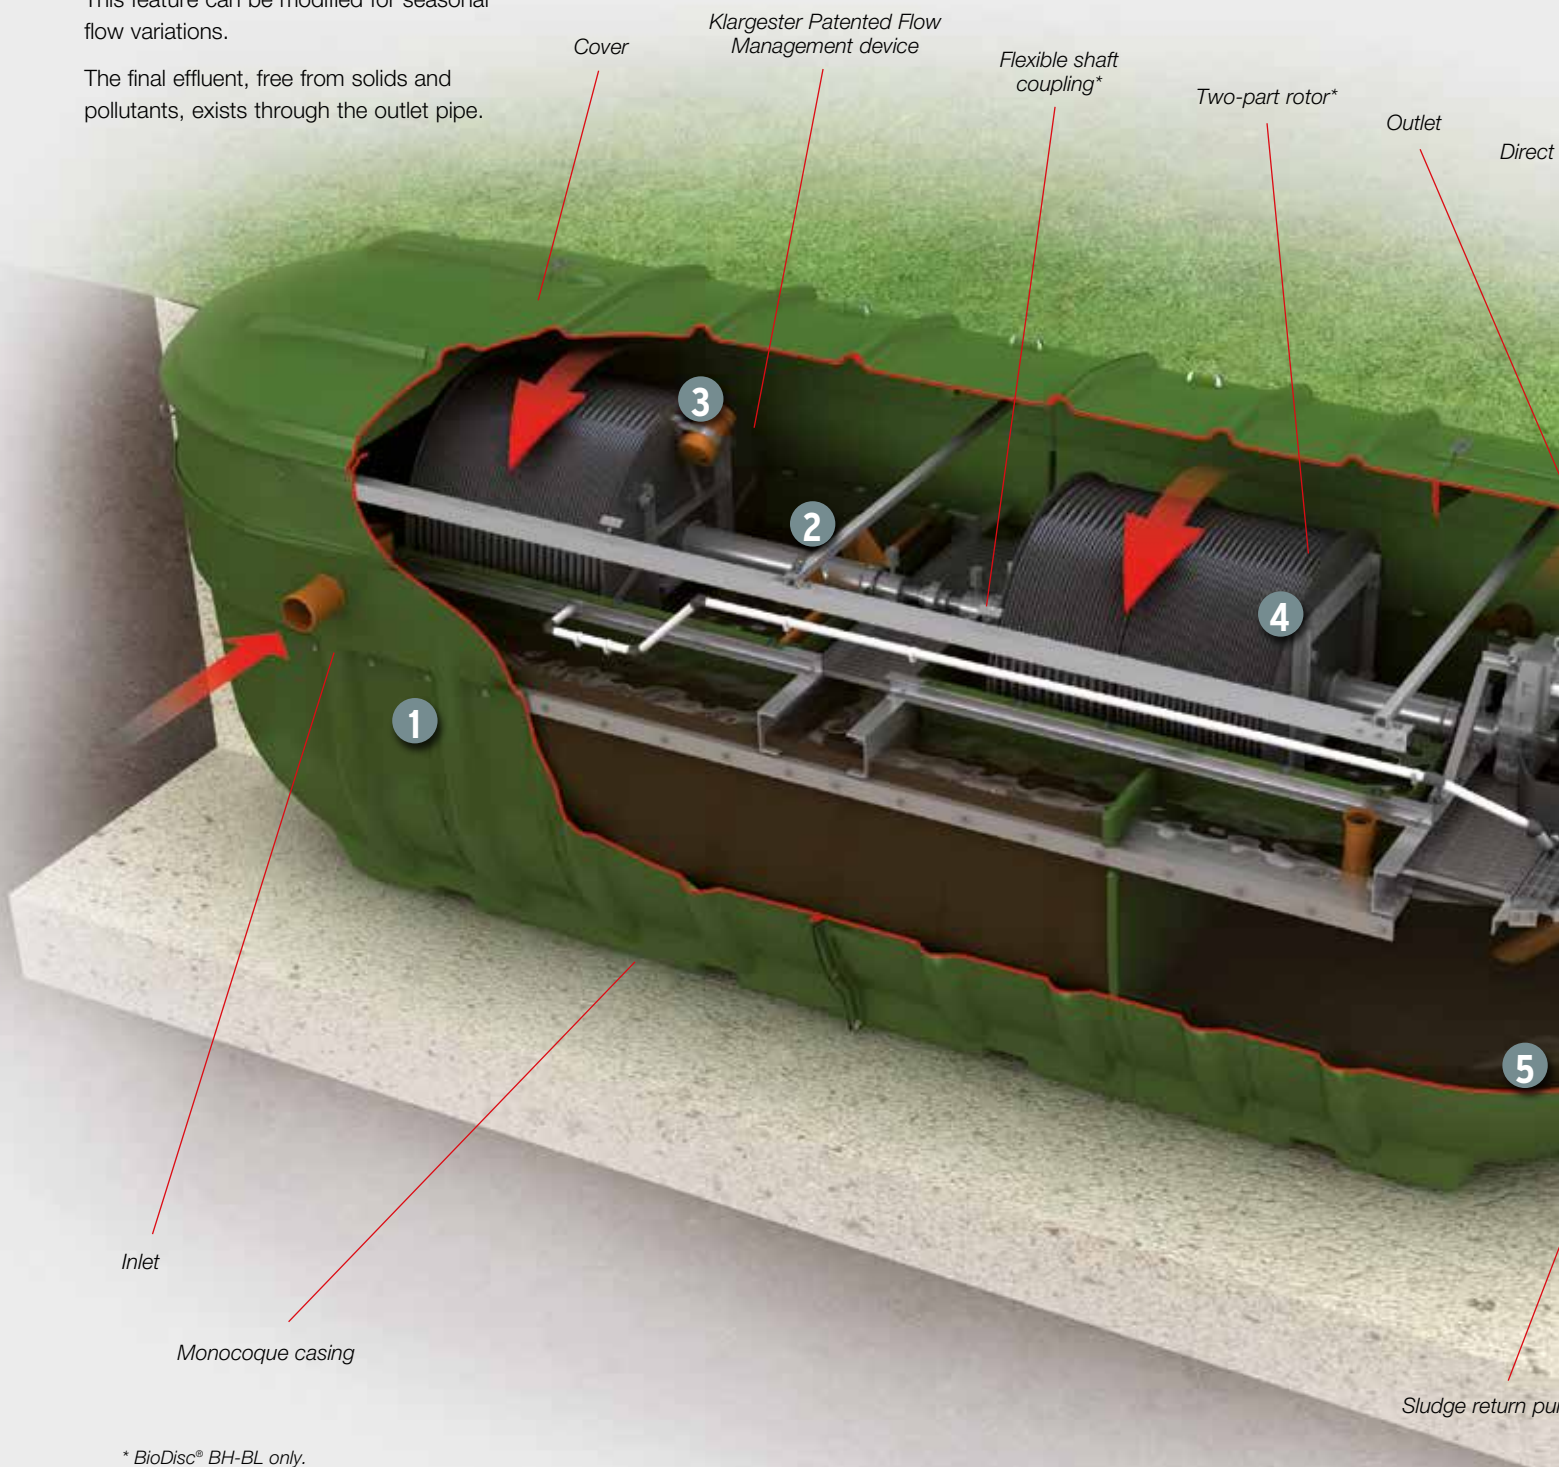

* BioDisc® BH-BL only.




- No odour or environmental nuisance
- Silent in operation

Consistent Effluent Quality

These plant are designed to achieve an effluent quality of 20mg/l BOD, 30mg/l Suspended Solids and 20mg/l Ammonia on a 95% basis. These BioDisc® can also be configured to produce better standards of effluent quality with Ammonia levels as low as 5mg/l being achievable. Contact Kingspan Klargester for design support and further information.

- The systems are designed to deal with flows up to 3xDWF.
- Applications where commercial catering takes place will generate significant volumes of grease which should not be allowed to enter any treatment system.
- Kingspan Klargester manufacture a wide range of grease traps and their specialist advice should be sought in these types of applications.
- The treatment of sewage from applications other than domestic housing can often demand special precautions, therefore specialist advice should be sought from Kingspan Klargester.

STANDARD BIODISC® SINGLE PIECE SYSTEM

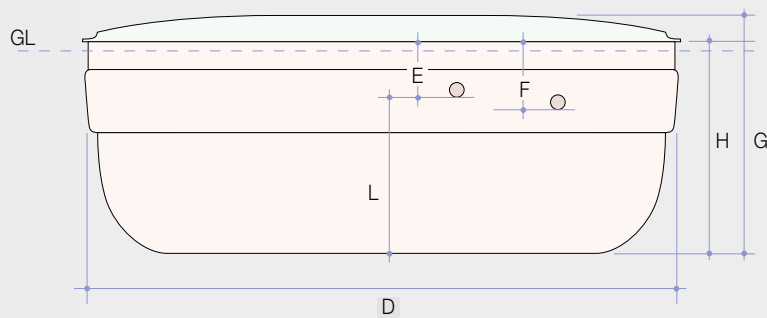

Note: Illustration is a schematic, do not use for installation. Refer to customer drawings for true pipework orientation.

The loadings given in the chart below are representative of typical domestic housing applications. The sizing of sewage treatment plant requires specialised knowledge and experience. Please consult Kingspan Klargester for an assessment of your application.

G.L. = Ground Level

UNIT SIZE	BD	BE	BF	BG	BH	BJ	BK	BL
MAXIMUM DAILY BOD (kg)	1.5	2.1	3.0	4.2	4.5	6.0	7.5	9.0
MAXIMUM DAILY FLOW (m ³)	5	7	10	14	15	20	25	30
D LENGTH (mm)	3,340	3,340	4,345	5,235	7,755	7,755	7,755	7,755
WIDTH (mm)	2,450	2,450	2,450	2,450	2,455	2,455	2,455	2,455
E INLET INVERT DEPTH (mm)	600*	600	600	600	600	600	600	600
L DEPTH BELOW INLET INVERT (mm)	1,820	1,825	1,820	1,820	1,790	1,790	1,790	1,790
F OUTLET INVERT DEPTH (mm)	685	685	700	700	750	750	750	750
G OVERALL HEIGHT (mm)	2,825	2,825	2,825	2,875	2,830	2,830	2,830	2,830
H HEIGHT TO RIM OF COVER (mm)	2,485	2,485	2,485	2,485	2,500	2,500	2,500	2,500
EMPTY WEIGHT (kg)	1,100	1,200	1,315	1,660	3,000	3,100	3,200	3,300
STANDARD POWER SUPPLY	1 PHASE	1 PHASE	1 PHASE	1 PHASE	3 PHASE	3 PHASE	3 PHASE	3 PHASE
OPTIONAL POWER SUPPLY	3 PHASE	3 PHASE	3 PHASE	3 PHASE	1 PHASE	1 PHASE	1 PHASE	1 PHASE
MOTOR RATING: 1 PHASE/3 PHASE (watts)	75/60	75/60	120	180	250	250	370	370
FULL LOAD CURRENT 1 PHASE (amps)	1.10	1.10	1.26	1.70	1.95	1.95	2.35	2.35
FULL LOAD CURRENT 3 PHASE (amps)	.035	0.35	0.42	0.63	0.88	0.88	1.35	1.35
SLUDGE RETURN PUMP RATING (watts)	-	-	-	250	480	480	480	480

*Optional invert depth of 1,100mm is available.

Please refer to Kingspan Klargester for specialist advice for applications where primary settlement tanks or pump stations may be required.

drive motor*

mp*

Safety platform

CONTROL PANEL



SAMPLE CHAMBERS



EFFLUENT PUMPSETS

A septic tank or treatment system pumpset can be used to disperse settled effluent when a site has a high water table or adverse invert levels. Installed after the treatment system and pumping settled effluent up to an inspection chamber, flow to the drainage system then takes place by gravity in the normal way.

SAMPLE CHAMBERS

When a treatment plant discharges, it is a regulatory requirement to have a sampling point so that the effluent quality can be periodically checked by regulatory bodies.

Available to suit all outlet depths of our standard ranges, a Kingspan Klargester sample chamber provides the solution, enabling both quick installation and easy access for accurate and convenient effluent testing.

SAFETY FEATURES

- Low profile lockable covers
- Fully removable covers to ease maintenance, simplify de-sludging and provide a safe working environment without the need for restricted access provision, a requirement of the Confined Spaces Regulations 1997
- Full platform access to motor and bearings
- Secure lockable control panel
- Integrated loss of rotation alarm (optional on BD-BG, standard on BH-BL)

* BioDisc® BH-BL only.

**BioDisc® BH-BL only.
Chain drive on BioDisc® BD-BG.

CONTROL PANEL

The plant are supplied with either a single phase or a three phase direct drive motor and come complete with a control panel and feature:

- inversion device included within the panel*
- single phase power supply to the panel converted within the panel to three phase prior to connection to the drive motor

LOW OPERATING COST

BioDisc® has proven track record for high quality performance, reliability and low operational costs and the new range incorporates features that further enhance that reputation:

- designed to run from either a single phase or 3 phase power source
- require 60 to 370 watt motors, offering the lowest running costs of any plant in their class

DIRECT DRIVE

The disc assembly rotates through the sewage effluent and supports the growth of a biological matrix. When fully loaded with saturated bacteria the disc assembly becomes heavy, therefore both drive and rotor design are critical. Klargester have many years experience in this field and these new products provide a number of new features:

- direct drive motor which is fixed directly to the disc shaft*
- no requirement for chain or belt drive**
- reduced and simplified maintenance

TWO-PART SHAFT

A two-part shaft has been incorporated to simplify maintenance and reduce bearing wear. The new Kingspan Klargester two-part shaft assembly:

- supports the rotor in four places rather than two
- significantly reduces the load and wear on the shaft and bearings
- features bearings selected for long life
- features bearings fitted with automatic grease capsules that only require annual replacement
- simplifies installation by reducing potential drive alignment and bearing wear problems sometimes associated with long single shaft motors

ROTOR DESIGN

New range includes the well established Klargester rotor design which:

- is compact and structurally sound
- is designed and built for long life without the need for rotor maintenance often associated with sectional bolted rotor assemblies

MONOCOQUE CASING

All BioDisc® in this range utilise the same casing, providing:

- lightweight, yet robust and structurally strong GRP construction for easy on-site handling
- steel cradle integrated into the casing provides stable platform for mechanical components
- factory pre-engineered to exacting Kingspan Klargester standards, ensuring consistent high quality and eliminating on-site assembly
- full length ports providing quick and easy access for desludging
- 600mm invert depth, with only 150mm head loss through the plant
- variable desludging/emptying cycles

PROFESSIONAL INSTALLERS

Kingspan Klargester Accredited Installers

Experience shows that correct installation is a prerequisite for the long-lasting and successful operation of any wastewater treatment product. This is why using an installer with the experience and expertise to install your product is highly recommended.



Services include :

- Site survey to establish ground conditions and soil types
- Advice on system design and product selection
- Assistance on gaining environmental consents and building approvals
- Tank and drainage system installation
- Connection to discharge point and electrical networks
- Waste emptying and disposal

Discover more about the Accredited Installers and locate your local expert online.

www.kingspanklargester.com



CARE & MAINTENANCE

Kingspan Environmental Services

Who better to look after your treatment plant than the people who designed and built it?



Kingspan Environmental have a dedicated service division providing maintenance for wastewater products.

Factory trained engineers are available for site visits as part of a planned maintenance contract or on a one-off call out basis.

To find out more about protecting your investment and ensuring peace of mind, call us on:

0844 846 0500

or visit us online:

www.kingspanenvservice.com



COMMERCIAL WASTEWATER SOLUTIONS

- BIODISC®, BIOTEC™ & ENVIROSAFE HIGH PERFORMANCE SEWAGE TREATMENT SYSTEMS
- OIL/WATER SEPARATORS
- BELOW GROUND STORAGE TANKS
- GREASE & SILT TRAPS

NEW BUILD & RETROFIT SOLUTIONS

- BELOW GROUND RAINWATER HARVESTING SYSTEMS
- ABOVE GROUND RAINWATER HARVESTING SYSTEMS

Kingspan Klargester

UK: College Road North, Aston Clinton, Aylesbury, Buckinghamshire HP22 5EW

Tel: +44 (0) 1296 633000 Fax: +44 (0) 1296 633001 Scottish Office: Tel: +44 (0) 1355 248484
email: klargester@kingspan.com

Scotland: Wardhead Park, Stewarton, Ayrshire, Scotland, KA3 5LH

Tel: 01560 486 589

Ireland: Unit 1a, Derryboy Road, Carnbane Business Park, Newry, Co. Down BT35 6QH

NI Tel: +44 (0) 28 302 66799 Fax: +44 (0) 28 302 60046 ROI Tel: 048 302 66799 Fax: 048 302 60046
email: info@klargester.ie

Visit our website www.klargester.com, or our company website www.kingspanenv.com

Follow us on:



@kingspanenv



youtube.com/kingspanenvironment



In keeping with Company policy of continuing research and development and in order to offer our clients the most advanced products, Kingspan Environmental reserves the right to alter specifications and drawings without prior notice.