

FuelMaster[®]

Diesel Storage and Dispensing Solutions Product Guide

Available from 2500-5000 litres



FuelMaster®

Intelligent Diesel Storage and Dispensing Solutions

Available from 2500-5000 litres

The Kingspan FuelMaster range offers a robust and convenient on site storage solution. This range has been specifically designed for the secure storage, dispensing and protection of diesel fuel.

The FuelMaster range is available in two 2500 and 5000 litre capacities with a number of specification options and intelligent tank monitoring systems to suit all agricultural, construction, mining and transportation requirements.

All FuelMaster tanks are double skinned for environmental protection and to safeguard against contamination. The tanks are fitted with a lockable cabinet providing security for internal equipment.

The Kingspan FuelMaster gives our customers a quality, cost-saving and compliant diesel storage solution backed by excellent customer service and a 10 year tank guarantee*.

Power and Safeguard your Business

- **Over 40 years experience**
Trust and reliability
- **10 Year Guarantee***
Total peace of mind
- **Quality Assured**
Quality certificate for BS EN ISO 9001: 2000
- **Bunded Storage**
Environmental Protection
- **Ease of Use**
Easy to lift through integrated lifting points

Tank Monitoring Systems

The FuelMaster range offers unique tank monitoring systems giving you the intelligence, visibility and data you need to take control of your diesel stocks.


The Watchman Sonic Plus and UniWatchmanRX local tank monitoring options allow users to continually monitor their diesel levels ensuring they never run out. The telemetry includes an audible and visual overfill and leak protection system for environmental protection.



Equipment Options*:

1. Double Skinned Tank
2. 72L/m Diesel Transfer Pump
3. 56L/m Diesel Transfer Pump
4. K600 B/3 Digital Flowmeter
5. K33 Analogue Flowmeter
6. 6m 3/4" Delivery Hose
7. 4m 3/4" Delivery Hose
8. 2" BSP Filling Point with ballvalve
9. A60 Automatic Nozzle
10. Nozzle Holder
11. Mechanical Clock Gauge
12. Watchman Sonic Plus
13. Uni Watchman RX Level Display and Leak Detection
14. Transparent Filter with Blanking Cap
15. Light in Housing

* See back page for more specification options

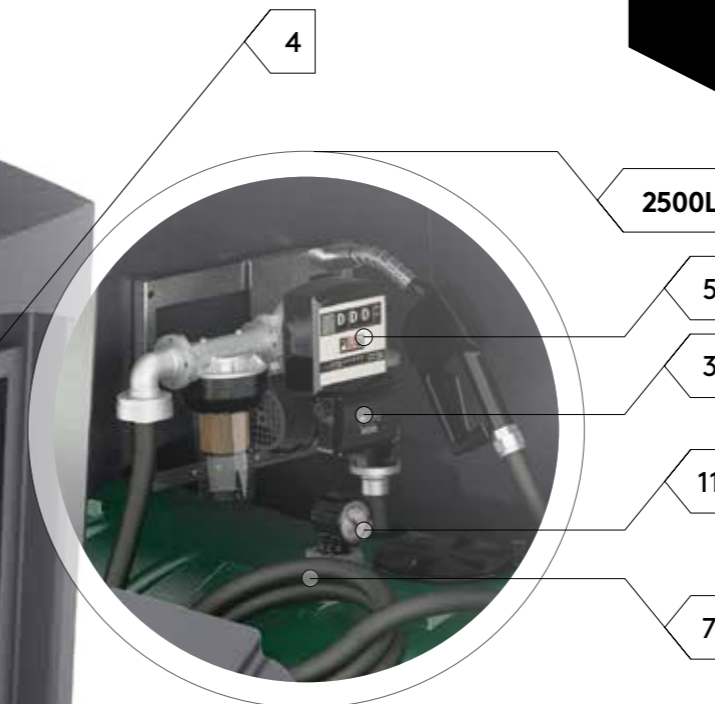

Product Dimensions

Capacity	2500L	5000L
Length	2130 mm	2650 mm
Width	1550 mm	2150 mm
Height	1950 mm	2250 mm

The product dimensions can vary from +/- 1%

* Two year guarantee on parts

Specification Options

Data sheets are available for each of the specification options below

FuelMaster®

	2500L	5000L	2500L	5000L
Specification	Export Specification 1	Export Specification 1	Export Specification 2	Export Specification 2
Double Skinned Tank	•	•	•	•
Green Door	•	•	•	•
56L/min 230V Diesel Transfer Pump	•	•	•	
72L/min 230V Diesel Transfer Pump				•
K33 Analogue Flowmeter	•	•		
K600 B/3 Digital Flowmeter			•	•
4m ¾" Delivery Hose	•		•	
6m ¾" Delivery Hose		•		•
A60 automatic nozzle	•	•	•	•
Nozzle holder	•	•	•	•
30 micron Glass Filter with Blanking Cap	•	•	•	•
Mechanical Clock Gauge	•		•	
Watchman Sonic Plus & UniWatchman RX Level Display and Leak Detection Alarm		•		•
4" Lid for filling/inspection	•		•	
2" BSP Filling Point with ball valve		•		•
PIR Light in housing	•	•	•	•
Atmospheric Vent	•	•	•	•
Codes	0650000	0650001	0650002	0650004

* Includes pump, flowmeter, nozzle and nozzle holder

CEE Office

Kingspan Environmental Sp. z o.o.
ul. Topolowa 5, 62-090 Rokietnica
Poland
Tel.: +48 61 814 44 00
Fax: +48 61 814 54 99
Email: biuro@kingspan-env.pl

Head Office

180 Gilford Road, Portadown,
Co. Armagh, BT63 5LF
United Kingdom
Tel: +44 (0) 28 3836 4444
Fax: +44 (0) 28 3836 4445
Email: tankinfo@kingspan.com